



## WILLFUL NEGLECT CHAIN INSTALLATION INSTRUCTIONS

### **WARNING:**

Bicycle products should be installed and serviced by a professional mechanic. Never modify your bicycle or accessories. Read and follow all product instructions and warnings including information on the manufacturer's website.

### **CHAIN LENGTH**

Chain tool required.

### **REPLACING A WORN CHAIN:**

Measure the worn chain and shorten the new chain to the same length.

### **INITIAL ASSEMBLY:**

Shorten the chain to the length specified by the derailleur manufacturer.

### **DERAILLEURS:**


- Place the chain over the largest front chainwheel and largest rear sprocket. For rear suspension frames, position the rear suspension for the greatest chain length required
- Add two links or one link plus the connecting link



## WILLFUL NEGLECT CHAIN INSTALLATION INSTRUCTIONS

### CONNECTING LINK INSTRUCTIONS

1. Fit chain to the correct length; clean and lubricate bearing and pin.
2. Insert pin plate into both chain ends. FIG. 1
3. Bend both ends of the chain slightly towards you and click in the other end. FIG 2
4. Pull both ends of chain slightly away from you to lock chain in place. FIG.3
5. Check connectors for correct assembly. Opening: bend chain slightly and pull off the plate. FIG. 2

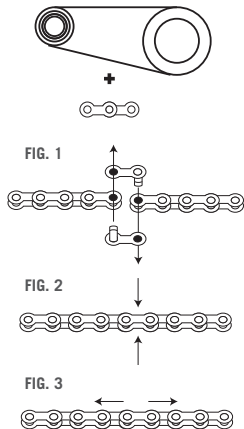

FOR ADDITIONAL PRODUCT AND SAFETY INFORMATION GO TO [WWW.45NRTH.COM/SAFETY](http://WWW.45NRTH.COM/SAFETY).

45NRTH  
6400 WEST 105TH STREET  
BLOOMINGTON, MN 55438-2554  
P. 952-941-9391 EXT. 1277

**45NRTH.COM**